

Cable Management Where time, safety and appearance matter

Cable Management

Where time, safety and appearance matter

Contents

About D-Line
Decorative Trunking (overview)4
½ round Mini Trunking6
½ round Micro Trunking8
½ round 50x25mm Trunking9
¼ round Trunking10
Floor Trim
Guide to trunking & accessories
Trunking & accessories product codes
Safe-D® Fire Rated Clips
Medium Duty Linkable Floor Covers
Light Duty Floor Cover
Cable Tidy Pre-Split Tube
Cable Tidy Spiral Wrap
Cable Tidy Units
Cable Tidy Bases
Cable Tidy Clips
Cable Tidy Twists
Cable Tidy Band



D-Line is a UK company with a global reputation for innovative cable management products, that satisfy popular demands wherever **time, safety** and **appearance** matter.

Time...

Use D-Line trunkings to contain cables when channelling surfaces or lifting floors is impractical. The patented hinged & click-lock lids combine to make D-Line trunkings quick and easy to install.

Safety...


In event of fire, Safe-D[®] Clips hold cables secure for at least 2 hours at 930°C - to prevent cables dropping and so eliminating the danger of entanglement on escape routes.

D-Line Floor Cable Covers protect cables and minimise risks of trips and falls; our Cable Tidy range addresses other hazards of trailing wires.

Appearance...

The shapes and style of D-Line products subtly blend with decor, or can create a striking feature!

Since pioneering iconic D-shaped trunkings we've developed a broad range of cable management solutions, designed to save time and cost, reduce safety concerns, while looking great in-situ. All are fully safety tested and certified to highest quality standards.

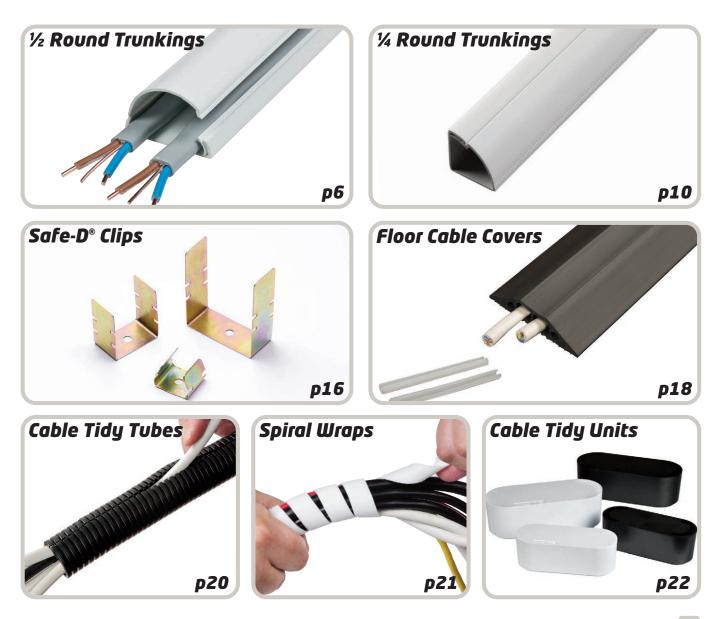

D-Line Decorative Trunking

"D-Line helps us win jobs, saving time and the hassle of recessing cables, providing a quality finish not possible with alternative trunkings"

	Feature	Benefit
	Designer shapes	 Making surface installations a preferred option Saves channelling walls & lifting floors Tapered designs give subtle appearance
	√2 round profiles	 Shape blends above skirting or neatly hides cable drops Alternative sizes satisfy popular demands Available as (width x height) 16x8mm, 30x15mm, 40x20mm, 50x25mm & 60x30mm Gentle on impact and easier to clean
	ل ۲۵ ۲۰۰۲ ۲۰۰۲ ۲۰۰۲ ۲۰۰۲ ۲۰۰۲ ۲۰۰۲ ۲۰۰۲ ۲	 Available in (w x h) 22x22mm & 30x30mm 22x22mm makes the ultimate floor trim (see p11) Can also be used as cornice or coving
	PVC	 Self extinguishing UV stabilised Lightweight & easy to cut Stable between -30°C to +60°C Satisfies BS EN 50085-1:2005
click	Patented hinge & click-lock lid	 Single-piece design for quick & easy handling Lids will never peel or detach - maintenance friendly Tensioned hinge provides a cable retainer to keep cables in position during installation Easy to later add or remove cables User friendly in tight spaces (machines, furniture etc) Hinge acts as a shock absorber on impact
	Film covered lengths	Keeps lengths pristine before installationEnvironmentally friendly packaging
	All lengths have self-adhesive foam backing	 Simply peel & stick Quick & easy to install Can be drilled also

Feature	Benefit
Paintable	• Can blend with any decor
Clip-Over & Smooth Fit accessories	 No need to mitre cut corners Provide perfect finish Clip-Over available for 30x15mm & 22x22mm profiles

Clip-Over Accessories (for 30x15mm & 22x22mm profiles) Design forgives rough cuts and imprecise measuring



Smooth Fit Accessories (all sizes) Internal shoulders fit securely under lengths









D-Line Decorative Trunking is available in a range of colours

see pages 12-15 for more details

"The most innovative cable management development in decades... without the need to spoil surfaces, D-Line makes a better choice all round!"

2 1/2 Round Decorative Trunking

Mini Trunking (30x15mm)

Use D-Line 30x15mm (width x height) Mini Trunking to contain cables for new sockets (eg 2x 2.5mm Twin & Earth); lighting installations (eg 2x 1.5mm T&E); drops to switches (2x 1.5mm T&E) Fire Performance cables (eg 2x 1.5mm 2c FP); also Cat 5 cables (up to 4); Co-Axial and Broadband cables etc.



D-Line surface boxes feature easy push-out tabs (see p13)



Case Study

When 20,000 hotel rooms needed to hide cables for new heating controllers, D-Line Mini Trunking proved the perfect choice...

Using D-Line saved a small fortune compared to the cost of channelling the walls then re-plastering and re-decorating.

Aside the noise and disruption, trying to recess the cabling would have put rooms out-of-service. However traditional trunking did not look suitable for a hotel chain with a reputation for comfort and style.

Cables fed from wall mounted heaters to wall mounted controllers were concealed in D-Line Mini Trunking which blended with the skirting and, when necessary, up-and-around bedheads.

A cut-length rose up to the heater via a clip-over Equal Tee, while clip-over Internal Bends made internal corner connections quick and easy. The Flat Bend required was the smooth-fit version, as the secure internal tabs were favoured to eliminate future maintenance concerns, given that this part was most likely to be bumped by guests' baggage.

The $\frac{1}{2}$ round shape of the length rising up to the wall-mounted controller was preferred also for its impact resistance, the lack of sharp edge a distinct benefit (compared to traditional sharp edge trunking).

The D-Line Cutting Tool was used throughout, saving time and leaving no dust.

The self-adhesive tape was used to attach the lengths to the walls, with a screwfixing and plug then inserted 750mm from each end.

The result was 20,000 installations using 200km - all easy to fit, quick to install and blending with decor. Further details on request.





Micro Trunking (16x8mm)

D-Line Micro Trunking is ideal for hiding speaker, telephone and alarm cables. The ½ round low-profile and tapered design can disappear with subtle aesthetics whatever the surface.












Frosted profiles available for special order ideal to contain & protect LED lighting strips while providing glare control & a means to drill & fix to surfaces


For display, safety, guidance and ambient lighting



50x25mm Trunking

D-Line 50x25mm Trunking contains cables in a stylish $\frac{1}{2}$ round design that saves the time and trouble of channelling, then having to repair walls. Plus there's the on-going benefit of the hinged and click-lock lid, making it easy to add or remove cables later. Available in a choice of colours (see p12-15) or can be painted...

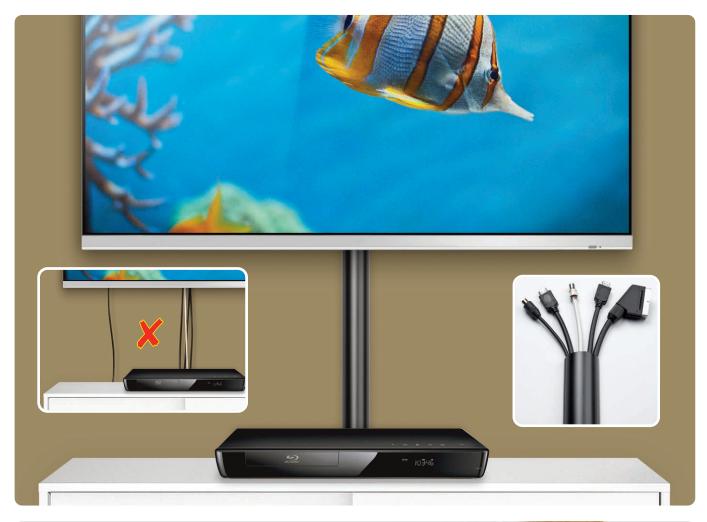




- Versatile, easy to add or remove cables
- Easy to cut & self adhesive
- Hinge & click-lock for speedy fix

// Round Trunking

D-Line ¼ round Trunking makes a neat choice to hide cables between two 90° surfaces. These ¼ Round profiles are popular around floors, worktops, covings & cornices.

22x22mm Trunking



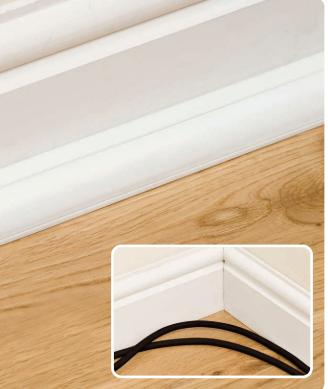

30x30mm Trunking



Floor Trim

D-Line Floor Trim provides the ultimate floor edging system... clip-over accessories eliminate the need for precise end-to-end measuring and mitre-cuts, making D-Line ¼ Round up to 50% quicker to install than traditional scotias - while providing a cable path! A choice of finishes are available.



Stainable Version accepts woodstains to match darker floors

Light Oak Wood-Grain Effect also available

Matching clip-over corner accessories (with congruent wood-grain effects) achieved by patented process technologies



"D-Line have considered every step to make floor trim easier to fit. No longer a time consuming job, we now use it as standard"

Guide to Trunking Colours... & Accessories

M Magnolia A Aluminium

В	Black
0	Oak Effect
R	Red

P Premium Wood* (stainable 22x22 only) F1 Wood Grain Effect (22x22 only)

illustrations not to scale

shape &						e e	6
size (wxh)		ß	<u> </u>	<u> </u>			
Trunking Lengths	60x30mm	50x25mm	40x20mm	30x15mm	16x8mm	22x22mm	30x30mm
3m Length							
2m Length							
1.5m Length							
1.2m Length							
1m Length							
3m Self Adhesive Divider							
suitable for all colours							
Clip-Over Accessories							
Flat Bend						use internal bend	
Internal Bend							
External Bend							
Equal Tee							
Door Top Bend							
Inlet/Outlet Coupler (22x22 only)							
Smooth Fit Accessories							
Flat Bend							
Internal Bend						use flat bend	use flat bend
External Bend							
Equal Tee							
Cable Outlet					use equal tee		
Cable Inlet							
Reducing Tee (to 30x15mm)							
Coupler							
End Cap							
End Cap Left (¼ round only)							
End Cap Right (¼ round only)							
Corner Tee							
Box Adaptor Tee							
30x15mm Box Adaptor							
Pattress Adaptor							
Circular Adaptor							
Other Accessories							
SAFE-D30 (BS5839 part 1)				v			 ✓
SAFE-D40 (BS5839 part 1)		 ✓ 	 ✓ 				
SAFE-D50 (BS5839 part 1)	 ✓ 						
Ratchet Cutting Tool			 ✓ 	v	v	 ✓ 	v
28mm Single Surface box						own finish, but can be stained acy surface of accessory with f	
28mm Twin Surface box		Clip-O	ver Access	ories	Smoo	th Fit Acces	sories

35mm Single Surface box 35mm Twin Surface box











1/2 Round Clip-Over Accessories (30x15mm only)



Internal Bend Join lengths around 90 degree inside corners



Join lengths around 90

degree outside corners



Flat Bend Change direction by 90 degrees on flat surfaces lengths of same profile



Equal Tee Use to clip-over 3



Door Top Bend Change direction by 90 degrees around frame tops

1/2 Round Clip-Over Accessories (22x22mm only)



Internal Bend Join lengths around 90 degree inside corners



degree outside corners

External Bend Cable Inlet/Outlet Join lengths around 90 Use to provide cable entry/exit point between 2 lengths



Use with smooth-fit **Couplers & End Caps**

1/2 Round Smooth Fit Accessories



Internal Bend Join lengths around 90 degree inside corners



Circular Adaptor Connect 30x15mm Mini Trunking to flat edge surfaces with 20mm Ø knock-outs



Join lengths around 90 degree outside corners



Pattress Adaptor Connect 30x15mm Mini Trunking to round surface pattresses



Flat Bend Change direction by 90 degrees on flat surfaces same profile

Takes cables in or out

of a 30x15mm Mini

Trunking installation.

Use between lengths on straight runs





Use to join 3 lengths of



Coupler Join 2 lengths of same profile on flat surface



Box Adaptor Tee For use with D-Line surface Socket Boxes



End Cap Neatly finish open ends



Reducing Tee Connect to 30x15mm Mini Trunking

1/4 Round Smooth Fit Accessories



Internal Bend Join lengths around 90 degree inside corners



External Bend Join lengths around 90 degree outside corners



Cable Inlet Use to provide cable entry point between 2 lenaths



Cable Outlet Use to provide cable exit point between 2



Coupler Joins 2 lengths on flat surfaces



End Cap Neatly finish open ends (left & right versions apply)





Single Surface Socket Box For use with 30x15mm D-Line Mini Trunking.. Available in 28mm & 35mm depth



Twin Surface Socket Box For use with 30x15mm D-Line Mini Trunking.. Available in 28mm & 35mm depth



SAFE-D30 Clip Fire rated cable clip for use with 30x15mm D-Line & 25mm+ wide traditional trunkings



SAFE-D40 Clip Fire rated cable clip for use with 40x20mm D-Line & 40mm+ wide traditional trunkings



SAFE-D50 Clip Fire rated cable clip for use with 60x30mm D-Line & 50mm+ wide traditional trunkings



Ratchet Cutting Tool Use to cut up to 40mm wide D-Line Trunking





lenaths

Cable Inlet/Outlet Box Adaptor

For use with D-Line

surface Socket Boxes

Trunking & Accessories Product Codes

A 1/2 Round 16x8mm Micro Trunking

		White	Magnolia	Aluminium Effect	Black	Oak
S	3.0m Length	R3D1608W	R3D1608M	R3D1608A	R3D1608B	R3D1608O
Lengths	2.0m Length	R2D1608W	R2D1608M	R2D1608A	R2D1608B	R2D1608O
۳	1.5m Length	R15D1608W	R15D1608M	R15D1608A	R15D1608B	R15D1608O
	Smooth Fit Internal Bend	IB1608W	IB1608M	IB1608A	IB1608B	IB1608O
د يز	Smooth Fit External Bend	EB1608W	EB1608M	EB1608A	EB1608B	EB1608O
S II	Smooth Fit Flat Bend	FB1608W	FB1608M	FB1608A	FB1608B	FB1608O
Smooth Fit Accessories	Smooth Fit Equal Tee	NET1608W	NET1608M	NET1608A	NET1608B	NET1608O
2 S S S S	Smooth Fit Coupler	NCP1608W	NCP1608M	NCP1608A	NCP1608B	NCP1608O
	Smooth Fit End Cap	EC1608W	EC1608M	EC1608A	EC1608B	EC1608O

1/2 Round 30x15mm Mini Trunking

		White	Magnolia	Aluminium Effect	Black	Oak	Red
	3.0m Length	R3D3015W	R3D3015M	R3D3015A	R3D3015B	R3D3015O	R3D3015R
Lengths	2.0m Length	R2D3015W	R2D3015M	R2D3015A	R2D3015B	R2D3015O	-
	1.5m Length	R5FT3015W	R5FT3015M	R5FT3015A	R5FT3015B	-	-
	3.0m Self Adhesive Internal Divider	3AD3015L	-	-	-	-	-
	Clip-Over Internal Bend	FLIB3015W	FLIB3015M	FLIB3015A	FLIB3015B	FLIB3015O	FLIB3015R
Clip-Over Iccessories	Clip-Over External Bend	FLEB3015W	FLEB3015M	FLEB3015A	FLEB3015B	FLEB3015O	FLEB3015R
Q N	Clip-Over Flat Bend	FLFB3015W	FLFB3015M	FLFB3015A	FLFB3015B	FLFB3015O	FLFB3015R
19 9	Clip-Over Door Top Bend	FLDB3015W	FLDB3015M	FLDB3015A	FLDB3015B	FLDB3015O	FLDB3015R
Ē	Clip-Over Equal Tee	FLET3015W	FLET3015M	FLET3015A	FLET3015B	FLET3015O	FLET3015R
	Smooth Fit Internal Bend	IB3015W	IB3015M	IB3015A	IB3015B	IB3015O	IB3015R
	Smooth Fit External Bend	EB3015W	EB3015M	EB3015A	EB3015B	EB3015O	EB3015R
lies	Smooth Fit Flat Bend	FB3015W	FB3015M	FB3015A	FB3015B	FB3015O	FB3015R
SSO	Smooth Fit Equal Tee	ET3015W	ET3015M	ET3015A	ET3015B	ET3015O	ET3015R
Smooth Fit Accessories	Smooth Fit Cable Outlet	CO3015W	CO3015M	CO3015A	CO3015B	CO3015O	-
Ē	Smooth Fit Coupler	CP3015W	CP3015M	CP3015A	CP3015B	CP3015O	CP3015R
Ë	Smooth Fit End Cap	EC3015W	EC3015M	EC3015A	EC3015B	EC3015O	EC3015R
odt	Smooth Fit Pattress Adaptor	PA3015W	-	-	-	-	-
, Š	Smooth Fit Circular Adaptor	CA3015W	-	-	-	-	CA3015R
	Smooth Fit Box Adaptor	BA3015W	BA3015M	BA3015A	BA3015B	BA3015O	BA3015R
	Smooth Fit Box Adaptor Tee	AT3015W	AT3015M	AT3015A	AT3015B	AT3015O	AT3015R
	28mm Deep Single Surface Box	SSB28W	SSB28M	SSB28A	SSB28B	SSB28O	SSB28R
ace (es	28mm Deep Twin Surface Box	TSB28W	TSB28M	TSB28A	TSB28B	TSB28O	-
Surface Boxes	35mm Deep Single Surface Box	SSB35W	-	-	-	-	SSB35R
	35mm Deep Twin Surface Box	TSB35W	-	-	-	-	-

¹/₂ Round 40x20mm Trunking

		White
s	3.0m Length	R3D4020W
Lengths	2.0m Length	R2D4020W
٩	1.2m Length	R1.2D4020W
	Smooth Fit Internal Bend	IB4020W
ы N	Smooth Fit External Bend	EB4020W
, Fi	Smooth Fit Flat Bend	FB4020W
smooth Fit Iccessories	Smooth Fit Equal Tee	ET4020W
Ĕ Ŭ	Smooth Fit Coupler	CP4020W
ΔĒ	Smooth Fit End Cap	EC4020W
	Smooth Fit Box Adaptor Tee	AT4020W



% Round 50x25mm Trunking

		White	Magnolia	Aluminium Effect	Black	Oak
sr	3.0m Length	R3D5025W	R3D5025M	R3D5025A	R3D5025B	R3D5025O
	2.0m Length	R2D5025W	R2D5025M	R2D5025A	R2D5025B	R2D5025O
Lengths	1.5m Length	R5FT5025W	R5FT5025M	R5FT5025A	R5FT5025B	-
٦	1.0m Length	R1D5025W	R1D5025M	R1D5025A	R1D5025B	R1D5025O
	3.0m Self Adhesive Internal Divider	3AD5025L	-	-	-	-
	Smooth Fit Internal Bend	IB5025W	IB5025M	IB5025A	IB5025B	IB5025O
ы N	Smooth Fit External Bend	EB5025W	EB5025M	EB5025A	EB5025B	EB5025O
h Fi orie	Smooth Fit Flat Bend	FB5025W	FB5025M	FB5025A	FB5025B	FB5025O
SSS	Smooth Fit Equal Tee	ET5025W	ET5025M	ET5025A	ET5025B	ET5025O
Smooth Fit Accessories	Smooth Fit Coupler	CP5025W	CP5025M	CP5025A	CP5025B	CP5025O
	Smooth Fit End Cap	EC5025W	EC5025M	EC5025A	EC5025B	EC5025O
	Smooth Fit Reducing Tee (to 30x15mm)	RT5030W	RT5030M	RT5030A	RT5030B	RT5030O

Note: Note: Note

	S	White	Magnolia	Aluminium Effect	Black
	3.0m Length	R3D6030W	R3D6030M	R3D6030A	R3D6030B
Lengths	2.0m Length	R2D6030W	R2D6030M	R2D6030A	R2D6030B
e,	1.5m Length	R15D6030W	R15D6030M	R15D6030A	R15D6030B
	3.0m Self Adhesive Internal Divider	3AD6030L	-	-	-
	Smooth Fit Internal Bend	IB6030W	IB6030M	IB6030A	IB6030B
ט ד	Smooth Fit External Bend	EB6030W	EB6030M	EB6030A	EB6030B
ii ii	Smooth Fit Flat Bend	FB6030W	FB6030M	FB6030A	FB6030B
Smooth Fit Accessories	Smooth Fit Equal Tee	ET6030W	ET6030M	ET6030A	ET6030B
Ĕ	Smooth Fit Cable Outlet	CO6030W	CO6030M	CO6030A	CO6030B
Ϋ́	Smooth Fit Coupler	CP6030W	CP6030M	CP6030A	CP6030B
	Smooth Fit End Cap	EC6030W	EC6030M	EC6030A	EC6030B

% Round 22x22mm Trunking & Floor Trim

		White	Oak Effect	Stainable Wood	Wood Grain Effect
Lengths	3.0m Length	R3D22QSW	R3D22QSO	-	-
Leng	2.0m Length	R2D22QSW	R2D22QSO	R2D22QSP	R2D22QSF1
ies	Clip-Over Internal / Flat Bend	FLIB22QSW	FLIB22QSO	FLIB22QSP	FLIB22QSF1
Clip-Over Accessories	Clip-Over External Bend	FLEB22QSW	FLEB22QSO	FLEB22QSP	FLEB22QSF1
Ğ Ü	Clip-Over Inlet/Outlet	FLCO22QSW	FLCO22QSO	FLCO22QSP	FLCO22QSF1
	Smooth Fit Internal / Flat Bend	FB22QSW	FB22QSO	FB22QSP	-
س ت	Smooth Fit External Bend	EB22QSW	EB22QSO	EB22QSP	-
n Fit	Smooth Fit Cable Inlet	CI22QSW	CI22QSO	CI22QSP	-
ooth esso	Smooth Fit Cable Outlet	CO22QSW	CO22QSO	CO22QSP	-
R S S S S S S S S S S S S S S S S S S S	Smooth Fit Coupler	CP22QSW	CP22QSO	CP22QSP	-
C C	Smooth Fit End Cap (left)	EC22QSW/L	EC22QSO/L	EC22QSP/L	-
	Smooth Fit End Cap (right)	EC22QSW/R	EC22QSO/R	EC22QSP/R	-

A Round 30x30mm Trunking

	-	White	Magnolia	Oak Effect
Lengths	3.0m Length	R3D30QSW	R3D30QSM	-
Leng	2.0m Length	R2D30QSW	R2D30QSM	R2D30QSO
	Smooth Fit Internal / Flat Bend	FB30QSW	FB30QSM	FB30QSO
ries	Smooth Fit External Bend	EB30QSW	EB30QSM	EB30QSO
SSO	Smooth Fit Cable Outlet	CO30QSW	CO30QSM	CO30QSO
Accessories	Smooth Fit Corner Tee	CT30QSW	-	-
	Smooth Fit Coupler	CP30QSW	CP30QSM	CP30QSO
Fit	Smooth Fit Box Adaptor	AT30QSW	AT30QSM	AT30QSO
G	Smooth Fit Reducing Tee (to 30x15)	RT30QSW	RT30QSM	RT30QSO
Smooth	Smooth Fit End Cap (left)	EC30QSW/L	EC30QSM/L	EC30QSO/L
	Smooth Fit End Cap (right)	EC30QSW/R	EC30QSM/R	EC30QSO/R

Safe-D[®] Fire Rated Clips


Safe-D® Clips are fully certified to satisfy legislative requirements to secure all surface cables in escape routes. When used with appropriate fixings they can securely hold bundles of cables on a surface at 930°C for at least 2 hours.

The publication of Amendment 3 to the 17th Edition (BS7671:2015) Wiring Regulations states (in Chapter 52 - Selection and Erection of Wiring Systems) under section 521.11 that after 1st July 2015 "Wiring systems in escape routes shall be supported in such a way that they will not be liable to premature collapse in the event of fire."



In Note 1, there is particular reference to failure of non-metallic trunking leading to cables hanging across access/egress routes & hindering evacuation/fire-fighting activities.

In Note 2, it specifically prohibits the use of non-metallic clips, cable ties or plastic trunking as the sole means of support. Where a non-metallic cable trunking is used, a suitable fire-resistant means of support must be provided to prevent cables falling into escape routes and causing potentially fatal entanglements.



Safe-D Clips Test & Certification - Conclusion (extract)...

"The test results demonstrate that the cable retaining clips do not reduce the circuit integrity below that afforded by the standard fire resisting cable used, and that they withstand a similar temperature and duration to that of a standard fire resisting cable, while maintaining adequate support. Consequently, the test results demonstrate that the clips meet the requirements of section 26.2 e) of BS 5839-1."





- High-temperature rated Safe-D Clips can hold cables for 2 hours at 930°C (+40° -0°)
- All Safe-D Clips are fully tested as BS5839 part 1 compliant; by Exova Warrington Fire...
 copy certification on request
- 20mm wide side-tabs & pliable gauge combine for quickest and easiest folding
- Smooth & rounded edges, as required by design code BS7671 s522.8.11, to protect soft-skin cables etc (and user friendly!)
- Passivated non-corrosive coating on all faces & edges
- 5mm diameter hole accepts all popular non-combustible fixings
- Ideal for ceiling voids, or popular PVC trunkings
 25mm 50mm widths
- Patent pending





SRFE-D30	mm	20mm	20mm 31mm	SR 20mm	FE-D50 30mm
23mm base for popular 2 cable combinations. (2x 2.5mm T&E 2x 1.5mm FP Cables; up to 4 Cat5)			mm trunking bases ax 20mm height		it up to 50mm trunking bases Folds to max 30mm height, nsuring space for air circulation within 50x50mm trunking
All Safe-D Clips are suitable for direct to surface fitting			Dado-Trunking	Trunk	Clips can fit traditional PVC ings (from 25x16mm up to mm profiles)
	SAFE Base Measure		SAFE-D4(Base Measurement =		SAFE-D50 Base Measurement = 46mm
Suitable for use with these	D-Line 30)x15mm	Size 3 40mm x 16mm Size 4 40mm x 25mm		Size 6 50mm x 25mm (w x h) Size 7 50mm x 32mm (w x h)

			<u> </u>
ru,	nk	inc	15

Pic shows SAFE-D30 in D-Line Mini Trunking 30x15mm

Size 2 25mm x 16mm (w x h)

To specify Safe-D Clips: High-temperature pliable-steel fire-rated clips with passivated non-corrosive finish, 20mm wide smooth-rounded-tabs to satisfy design requirement BS7671 s522.8.11, and capable of holding cables securely in compliance with performance requirement BS5839-1. Use with non-combustible fixings suitable for relevant surface.

Size 5 40mm x 40mm (w x h)


To fit at 300mm horizontal & 400mm vertical spacings.

To specify D-Line Mini Trunking: (eg For 2x 2c 1.5mm FP Cables) ½-Round Mini Trunking, produced using self-extinguishing PVC with non-detachable hinged & click-lock lid in a single piece design, as compliant with BS EN 50085 - 1:2005 Part 1. Use with proprietary accessories.

Size 8 50mm x 50mm (w x h)

Medium Duty Linkable Floor Cover

To protect cables and minimise the risk of trips and falls, these profiles are ideal in areas with regular foot traffic. Being linkable makes D-Line Medium Duty Floor Covers most versatile.

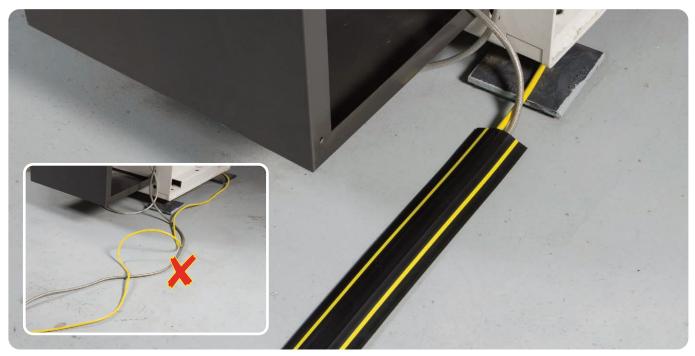


Each length is supplied with 2 connector pins.

Simply push these connector pins into pin holes to join 2 or more lengths, to make the run as long as required! Pull apart to release if necessary.

The ribbed back makes the lengths non-slip, so saving the need for adhesive tape. Single compartment versions (Types A & B) are pre-split to contain cables in the cavity.

Products are certified to BS EN 60670-1:2005.

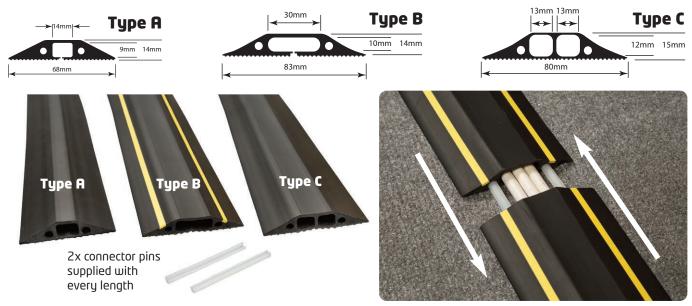

Supplied coiled in box; simply unroll to lay flat



Description	Colour	1.8m Part No.	9m Part No.
68mm wide with 14 x 9mm cable cavity	Black	FC68B	FC68B/9M
83mm wide with 30 x 10mm cable cavity	Black	FC83B	FC83B/9M
83mm wide with 30 x 10mm cable cavity	Black/Yellow	FC83H	FC83H/9M
83mm wide with 2 x 13 x 12mm cable cavities	Black	FC83B/2C	FC83B/2C/9M

Light Duty Floor Cover

The perfect choice to cover cables trailing across open floors with light foot traffic.



The cavity can accommodate 2 x 8mm popular flex type cables. The 1.8m and 9m lengths can be cut if required.

The profile is made of flexible grade PVC so effectively uncoils to lay flat. A ribbed back makes the length non-slip so eliminates the need for adhesive tapes. The pre-split rear cavity makes it easy to insert cables.

A tapered design and narrow width gives a discreet low-profile appearance to blend in any area. Products are certified to BS EN 60670-1:2005.





Supplied coiled in box; simply unroll to lay flat


Description	Colour	1.8m Part No.	9m Part No.
Light Duty 60mm wide with 17 x 9mm cable cavity	Black	CC-1	ርር-1/9ጠ

Cable Tidy Pre-Split Tube

To protect & tidy cables, pre-split Cable Tidy Tube is quick and easy to use and can fit around cables in-situ.



This pre-split conduit tubing is designed to provide a high degree of flexibility. Lengths are produced from material that is comfortable to use manually - so eliminating any need for application tools and making it easy to add or remove cables. Cable Tidy Pre-Split Tube is UV stabilised, and halogen free. Products are certified to BS EN 60695-2-10:2001. The 1.1m length makes a popular choice behind TVs and desks.









Description	Colour	Part No
32mm outer dia (26.2mm internal dia) 1.1m length	Black	CTT1.1B
32mm outer dia (26.2mm internal dia) 1.1m length	White	CTT1.1W
25mm outer dia (19.5mm internal dia) 1.1m length	Black	CTT1.1/25B

Cable Tidy Spiral Wrap

Cable Tidy Spiral Wrap provides a universally popular and versatile option for organising and protecting bundles of cables.



D-Line spiral wrap solution is versatile by the users ability to simply wrap by hand around the cables according to the diameter of the bundle (up to 40mm). Also cables can branch out along the length at any point and in any direction. For use to securely wrap cables together in offices, homes and factories - the lengths can be simply cut by scissors. Halogen free, UV stabilised, this spiral wrap offers good resistance to oils and lubricants, acids, alkalis and fuels.







Description	Colour	Part No
2.5m Spiral Wrap suitable for 10-40mm	Black	CTW2.5B
2.5m Spiral Wrap suitable for 10-40mm	White	CTW2.5W
3.0m Spiral Wrap suitable for 6-20mm	Black	СТШЗВ



Cable Tidy Units

Cable Tidy Units provide a smart and practical solution to safely and easily contain cable clutter.



Cable Tidy Units are available in two sizes to contain most 6 way or 4 way extension blocks, transformer plugs and associated cable spaghetti. With all cabling contained inside the Unit, wasted space is returned and surfaces become easier to clean. A safety trip and spill hazard is also eliminated.

The Units have 3 cable exits / entry slots in the rear so a neat front is always maintained. If a Unit is next to a wall, use D-Line Trunking lengths to hide entry and exit cables; alternatively consider D-Line Split Tube and Spiral Wrap.

Cable Tidy Units have been tested and certified to exacting safety standards (BS EN 60670-22:2006).







Case Study

As used at Wembley Stadium to contain 800+ extension blocks & cable clutter on solid floors below till points



Description	Black Part No	White Part No
Small Cable Tidy Unit (325mm W x 125mm D x 115mm H)	CTUSMLB	CTUSMLW
Large Cable Tidy Unit (415mm W x 165mm D x 135mm H)	CTULGEB	CTULGEW

22

Also Available...


Cable Tidy Bases



Save time retrieving fallen cables - Keep cables where needed

Description	Part No
Cable Tidy Base Black (bag of 100)	CTBASEBLK
Cable Tidy Base White (bag of 100)	CTBASEWHT
Cable Tidy Base Grey (bag of 100)	CTBASEGRY
Cable Tidy Base Pink (bag of 100)	CTBASEPNK
Cable Tidy Base Yellow (bag of 100)	CTBASEYLW
Cable Tidy Base Green (bag of 100)	CTBASEGRN

Cable Tidy Twists



Simply twist & lock to fasten bundles of cables

Description	Part No
Cable Tidy Twist 11mm dia (bag of 100)	CTWST/TL450
Cable Tidy Twist 15mm dia (bag of 100)	CTWST/TL600
Cable Tidy Twist 22mm dia (bag of 100)	CTWST/TL950
Cable Tidy Twist 28mm dia (bag of 100)	CTWST/TL1125
Cable Tidy Twist 35mm dia (bag of 100)	CTWST/TL1375

Cable Tidy Clips



The low-profile and narrow base provides a versatile solution

Description	Part No
1x Cable Tidy Clip (26mm W x 15mm D x 8mm H)	PPCTABSAW

Cable Tidy Band





D-Line (Europe) Limited Double Row, Seaton Delaval Whitley Bay, Tyne & Wear NE25 OPP United Kingdom

Tel: +44 (0)191 236 0960 Sales Tel: +44 (0)191 237 9156 Finance Tel: +44 (0)191 237 9157 Fax: +44 (0)191 236 0979

www.d-line-it.co.uk

